



MPA 220-6 XL

6V-220Ah - Cyclic AGM Battery

APPLICATIONS

- Mobile Home Equipment
- Marine Applications
- Personal Carriers
- Cleaning Machines
- Utility Vehicles

SPECIFICATIONS

Nominal Voltage	6V	
Nominal capacity @20 hour rate	220Ah	
Capacity at 25°C	10 hour rate	200Ah
	5 hour rate	180Ah
	1 hour rate	125Ah
Shelf time @20°C up to 70%	in months	9
Internal resistance (at 1 KHz)	approx. 2,7 mΩ	
Operating temperature for (dis)charge	-15°C to + 40°C	

DIMENSIONS


Dimensions LxWxH (T) in mm	260x180x245 (251)
Weight	30,2kg (±2%)
Separator	AGM, Glass Matt
Case and cover	ABS
Terminal	M8 Bolt
Torque setting (recommended)	M8: 10 Nm
Maximum allowable torque value	M8: 12 Nm

CHARGING

- Charging Voltage cycle use 7,2 to 7,45 Volt
- Float charge Voltage 6,8 to 6,9 Volt
- Charging current, minimum 25A - maximum 35A


CYCLE LIFE

To maximize the cycle life of the battery, we recommend to charge the battery fully after use. The total life of the battery, is very dependant on the correct charge and depth of discharge per cycle.

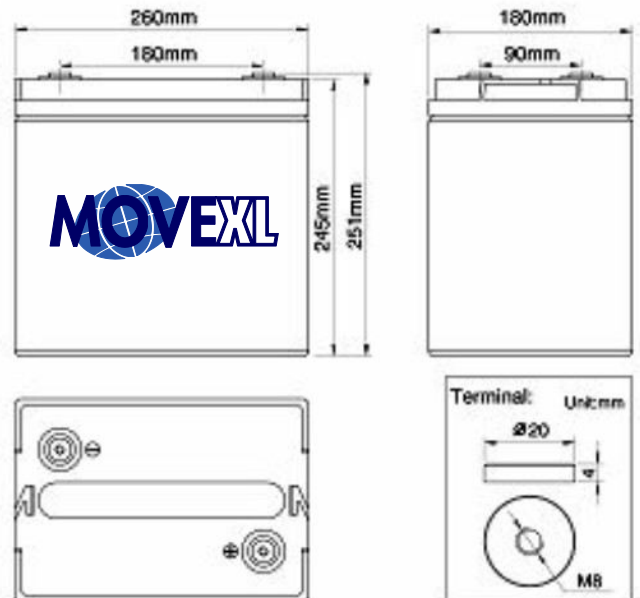

BATTERY LIFE UNDER CYCLIC USE

Tested in conformance to the BCI testing method

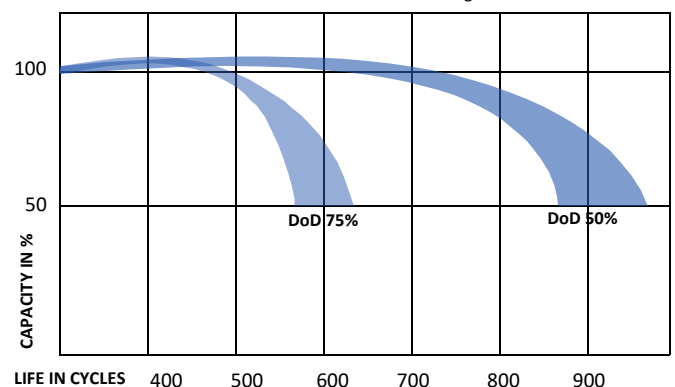

* Cycle life is measured with a discharge current 0,2C, charged 16h and rest capacity of 2/3 Cn