

APPLICATIONS



Powerchairs / home mobility equipment
 Scooters, 3- and 4 wheels
 Cleaning Machines
 Lifts (stairs / bathrooms)
 Personal Carriers
 Utility Vehicles

SPECIFICATIONS



Nominal Voltage	12V	
Nominal capacity @20 hour rate	85Ah	
Capacity at 25°C	10 hour rate	77Ah
	5 hour rate	67Ah
	1 hour rate	48Ah
Shelf time @20°C up to 70%	in months	9
Internal resistance (at 1 KHz)	approx. 5,5 mΩ	
Operating temperature for (dis)charge	-15°C to + 40°C	

DIMENSIONS



Dimensions LxWxH (T) in mm	260x171x211 (215)
Weight	26,1kg (±2%)
Separator	AGM, Glass Matt
Case and cover	ABS
Terminal	M6 Bolt
Torque setting (recommended)	M6: 7 Nm
Maximum allowable torque value	M6: 9 Nm

CHARGING




Charging Voltage cycle use 14,4 to 15 Volt
 Float charge Voltage 13,5 to 13,8 Volt
 Charging current, minimum 7A - maximum 17A


CYCLE LIFE



To maximize the cycle life of the battery, we recommend to charge the battery fully after use. The total life of the battery, is very dependant on the correct charge and depth of discharge per cycle.

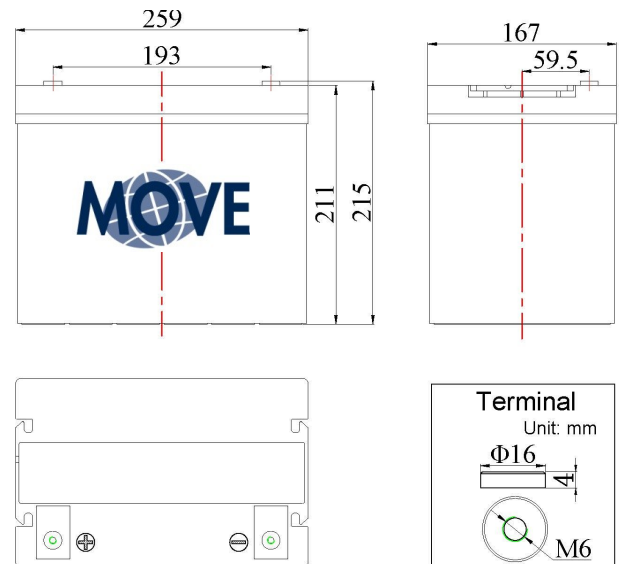

BATTERY LIFE UNDER CYCLIC USE

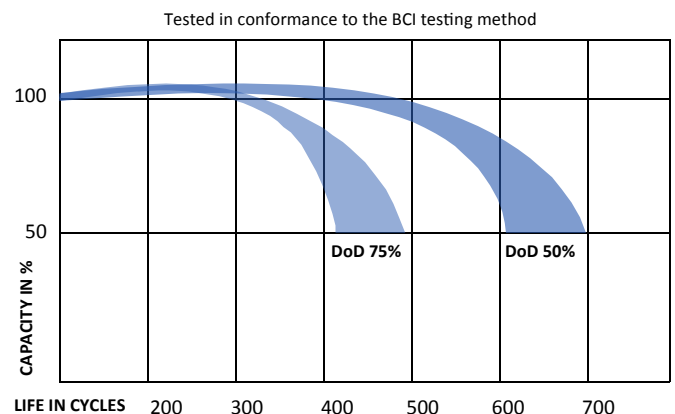

* Cycle life is measured with a discharge current 0,2C, charged 16h and rest capacity of 2/3 Cn