

### APPLICATIONS

Mobile Home Equipment  
Marine Applications  
Personal Carriers  
Cleaning Machines  
Utility Vehicles

### SPECIFICATIONS

Nominal Voltage	6V	
Nominal capacity @20 hour rate	330Ah	
Capacity at 25°C	10 hour rate	300Ah
	5 hour rate	265Ah
	1 hour rate	180Ah
Shelf time @20°C up to 70%	in months	9
Internal resistance (at 1 KHz)	approx. 1,8 mΩ	
Operating temperature for (dis)charge	-15°C to + 40°C	

### DIMENSIONS


Dimensions LxWxH (T) in mm	295x178x354 (360)
Weight	46,6kg (±2%)
Separator	AGM, Glass Matt
Case and cover	ABS
Terminal	M8
Torque setting (recommended)	M8 (Copper): 8 Nm
Maximum allowable torque value	M8 (Copper): 10 Nm

### CHARGING


Charging Voltage cycle use 7,2 to 7,45 Volt  
Float charge Voltage 6,8 to 6,9 Volt  
Charging current, minimum 35A - maximum 60A

### CYCLE LIFE

To maximize the cycle life of the battery, we recommend to charge the battery fully after use. The total life of the battery, is very dependant on the correct charge and depth of discharge per cycle.

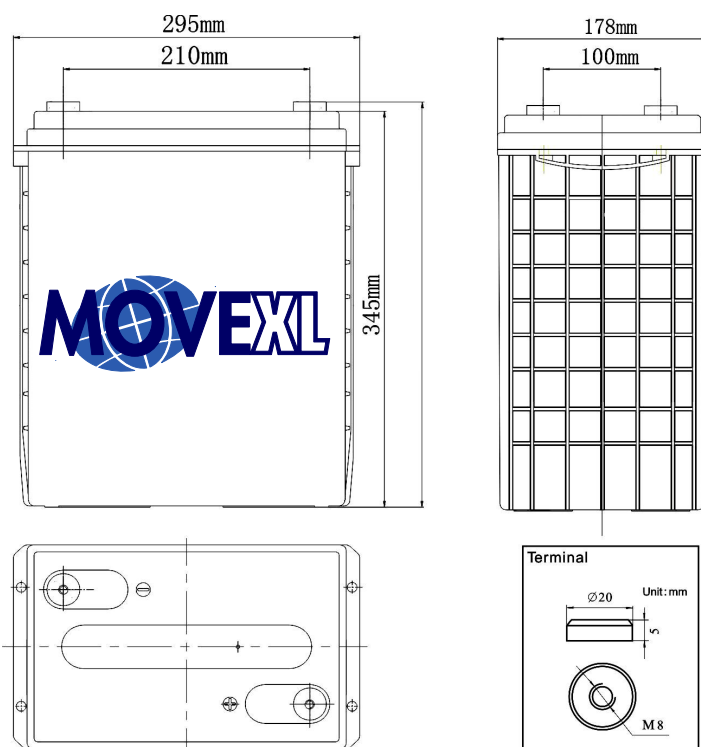

### BATTERY LIFE UNDER CYCLIC USE

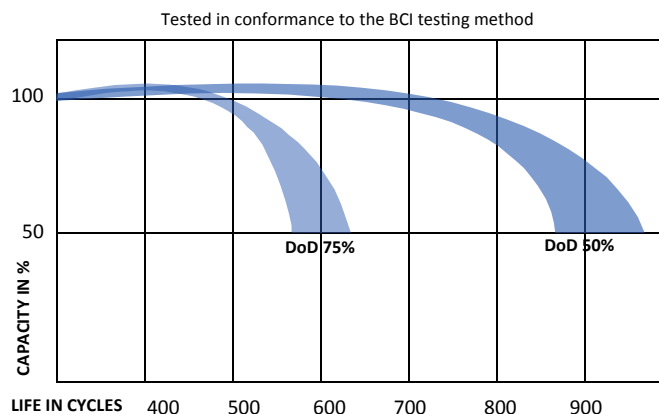

\* Cycle life is measured with a discharge current 0,2C, charged 16h and rest capacity of 2/3 Cn