

### APPLICATIONS

Mobile Home Equipment  
Marine Applications  
Personal Carriers  
Cleaning Machines  
Utility Vehicles

### SPECIFICATIONS

Nominal Voltage	6V	
Nominal capacity @20 hour rate	245Ah	
Capacity at 25°C	10 hour rate	225Ah
	5 hour rate	205Ah
	1 hour rate	145Ah
Shelf time @20°C up to 70%	in months	9
Internal resistance (at 1 KHz)	approx. 1,7 mΩ	
Operating temperature for (dis)charge	-15°C to + 40°C	

### DIMENSIONS


Dimensions LxWxH (T) in mm	260x180x265 (272)
Weight	34,5kg (±2%)
Separator	AGM, Glass Matt
Case and cover	ABS
Terminal	M8 Bolt
Torque setting (recommended)	M8: 10 Nm
Maximum allowable torque value	M8: 12 Nm

### CHARGING


Charging Voltage cycle use 7,2 to 7,45 Volt  
Float charge Voltage 6,8 to 6,9 Volt  
Charging current, minimum 25A - maximum 35A

### CYCLE LIFE

To maximize the cycle life of the battery, we recommend to charge the battery fully after use. The total life of the battery, is very dependant on the correct charge and depth of discharge per cycle.

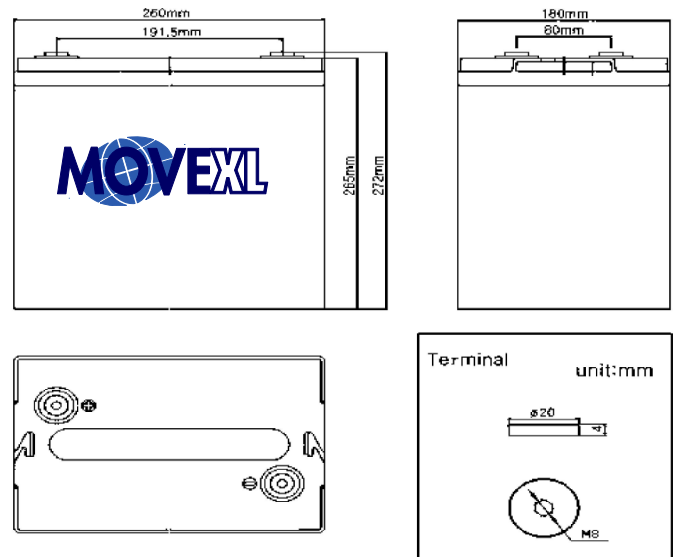

### BATTERY LIFE UNDER CYCLIC USE

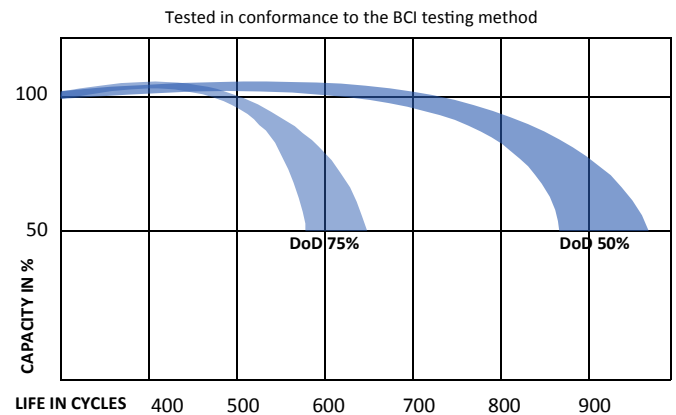

\* Cycle life is measured with a discharge current 0,2C, charged 16h and rest capacity of 2/3 Cn