

**XTRA CAPACITY  
XTRA LIFETIME  
XTRA MILEAGE**



### APPLICATIONS

- Powerchairs / home mobility equipment
- Scooters, 3- and 4 wheels
- Toys for children
- Lifts (stairs / bathrooms)
- Personal Carriers
- Utility Vehicles

### SPECIFICATIONS

Nominal Voltage	12V	
Nominal capacity @20 hour rate	105Ah	
Capacity at 25°C	10 hour rate	95Ah
	5 hour rate	85Ah
	1 hour rate	72Ah
Shelf time @20°C up to 70%	in months	9
Internal resistance (at 1 KHz)	approx. 5,4mΩ	
Operating temperature for (dis)charge	-15°C to + 40°C	

### DIMENSIONS


Dimensions LxWxH (T) in mm	260x168x215 (215)
Weight	26,1kg (±2%)
Separator	AGM, <b>Advanced Glass Matt</b>
Case and cover	ABS (UL94-V0 optional)
Terminal	M6 Bolt
Torque setting (recommended)	M6 (copper): 7 Nm
Maximum allowable torque value	M6 (copper): 9 Nm

### CHARGING


- Charging Voltage cycle use min. 14,8 to max. 16 Volt (U2)
- Float charge Voltage 13,5 to 13,8 Volt
- Charging current, minimum 10A - maximum 15A

### CYCLE LIFE

To maximize the cycle life of the battery, we recommend to charge the battery fully after use. The total life of the battery, is very dependant on the correct charge and depth of discharge per cycle.

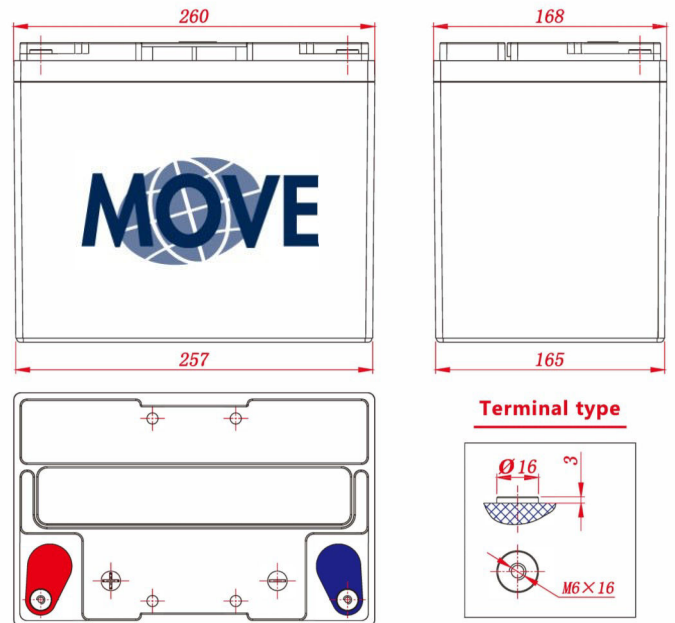

### BATTERY LIFE UNDER CYCLIC USE

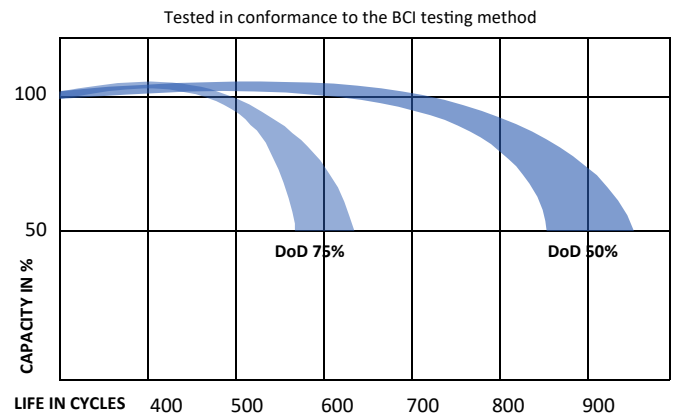

\* Cycle life is measured with a discharge current 0,2C, charged 16h and rest capacity of 2/3 Cn