

MOVE

MPA 105-12

12V-105Ah - Cyclic EV-AGM Battery

APPLICATIONS

Powerchairs / home mobility equipment
 Scooters, 3- and 4 wheels
 Cleaning Machines
 Lifts (stairs / bathrooms)
 Personal Carriers
 Utility Vehicles

SPECIFICATIONS

Nominal Voltage	12V	
Nominal capacity @20 hour rate	100Ah	
Capacity at 25°C	5 hour rate	85Ah
	3 hour rate	73.5Ah
	2 hour rate	66Ah
Shelf time @20°C up to 70%	in months	9
Internal resistance (at 1 KHz)	approx. 5,3 mΩ	
Operating temperature for (dis)charge	-15°C to + 40°C	

DIMENSIONS

Dimensions LxWxH (T) in mm	306x169x211 (216)
Weight	30,2kg (±2%)
Separator	AGM, Glass Mat
Case and cover	ABS
Terminal	M6 Bolt
Torque setting (recommended)	M6: 7 Nm
Maximum allowable torque value	M6: 9 Nm

CHARGING


Charging Voltage cycle use 14,4 to 15 Volt
 Float charge Voltage 13,5 to 13,8 Volt
 Charging current, minimum 10A - maximum 15A

CYCLE LIFE


To maximize the cycle life of the battery, we recommend to charge the battery fully after use. The total life of the battery, is very dependant on the correct charge and depth of discharge per cycle.

TRANSPORT INFORMATION

This battery is NON-SPILLABLE as defined in IATA Dangerous Goods Regulations Packing Instructions 806, Special Provision A67.

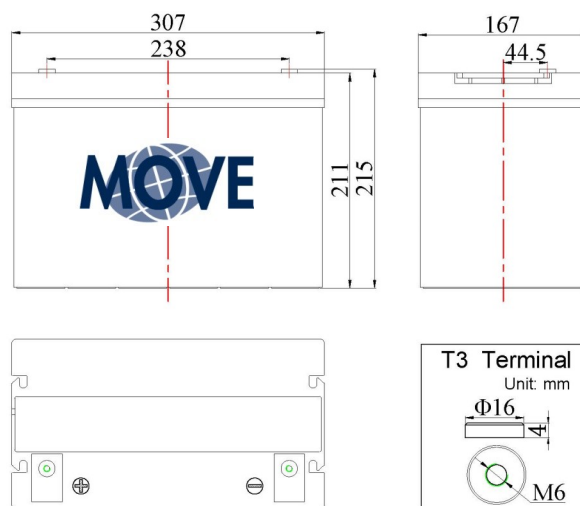

BATTERY LIFE UNDER CYCLIC USE

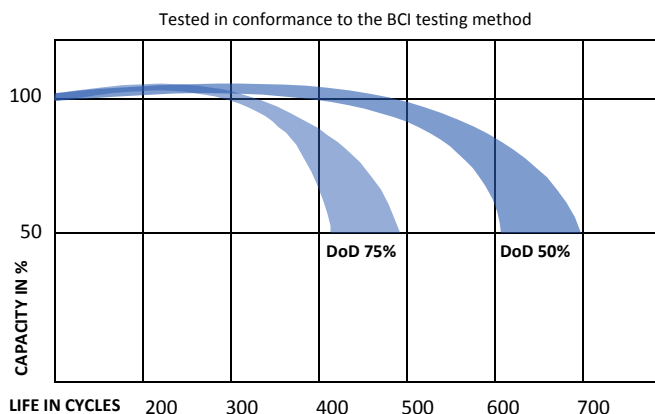

* Cycle life is measured with a discharge current 0,2C, charged 16h and rest capacity of 2/3 Cn